
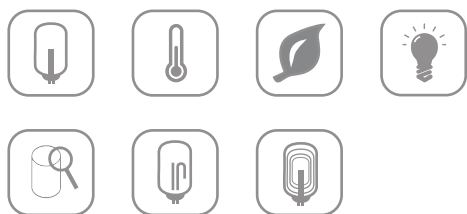


EP

400/500/600/800/1000

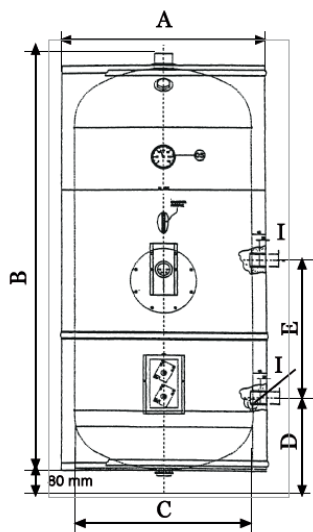

Modello	A mm	B mm	C mm	D mm	E mm	I mm
EP 400	750	1580	650	360	470	1 ¼
EP 500	750	1780	650	360	600	1 ¼
EP 600	800	1900	700	360	600	1 ¼
EP 800	1000	1870	900	370	600	1 ¼
EP 1000	1000	2150	900	370	600	1 ¼

Modello	Dispersione Termica 65° (Kwh/24h)	Potenza W	Voltaggio V	Tempo di riscal. Δt 50°	Hot water Production (l/h)	Pressione Max. (bar)	Cons. Kw/annum	Classe Isol.	Profilo	Classe Energ.
EP 400	22,98	4000	380	348'	139	6	8389	I	XXL	D
EP 500	28,72	5000	380	348'	167	6	10486	I	XXL	D
EP 600	34,92	6000	380	348'	223	6	12584	I	XXL	D
EP 800	46,46	8000	380	348'	80	6	16958	I	XXL	D
EP 1000	57,66	10000	380	348'	280	6	21047	I	XXL	D