



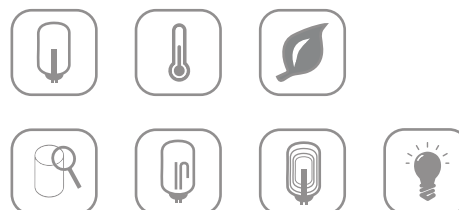

SLIM

Verticale

20/30/45/60/80

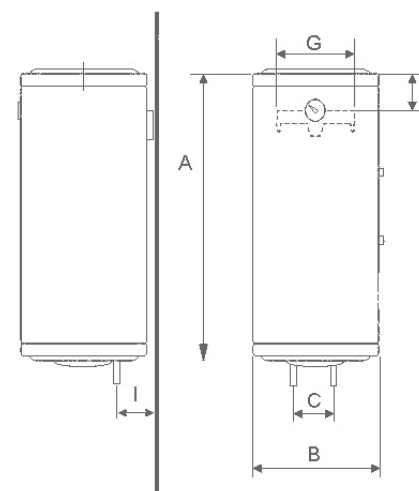

| Modello | A mm | B mm | C/E mm | F mm | G mm | I mm |
|----------------|---------|---------|-----------|---------|---------|---------|
| SLIM 20 | 350 | 370 | 100 | 70 | 250 | 90 |
| SLIM 30 | 450 | 370 | 100 | 70 | 250 | 90 |
| SLIM 45 | 700 | 370 | 100 | 120 | 250 | 90 |
| SLIM 60 | 850 | 370 | 100 | 120 | 250 | 90 |
| SLIM 80 | 1030 | 370 | 100 | 120 | 250 | 90 |

+ *IL NOSTRO OBIETTIVO:
SPACE SAVING*

| Modello | Dispersione Termica 65° (Kwh/24h) | Potenza W | Voltaggio V | Tempo di riscal. Δt 50° | Temp. Max Esercizio C° | Pressione Max Esercizio (bar) | Protezione Umidità | Classe Isol. | Profilo | Classe Energ. |
|----------------|--------------------------------------|--------------|----------------|----------------------------|---------------------------|----------------------------------|-----------------------|-----------------|---------|------------------|
| SLIM 20 | 0,56 | 1200 | 230 | 64' | 75 | 8 | IPX4 | I | S | C |
| SLIM 30 | 0,69 | 1200 | 230 | 75' | 75 | 8 | IPX4 | I | S | C |
| SLIM 45 | 0,72 | 1200 | 230 | 110' | 75 | 8 | IPX4 | I | M | C |
| SLIM 60 | 0,78 | 1200 | 230 | 150' | 75 | 8 | IPX4 | I | M | C |
| SLIM 80 | 0,79 | 1200 | 230 | 250' | 75 | 8 | IPX4 | I | M | C |