

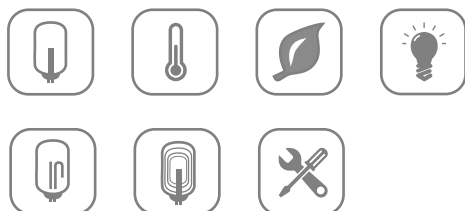


# A12

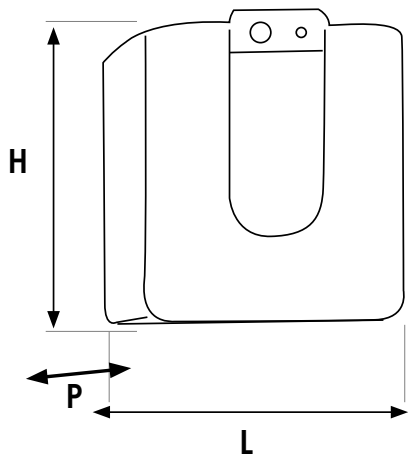

Models	H mm	L mm	P mm	
<b>A12 SP</b>	410	350	220	oversink
<b>A12 ST</b>	410	350	220	undersink

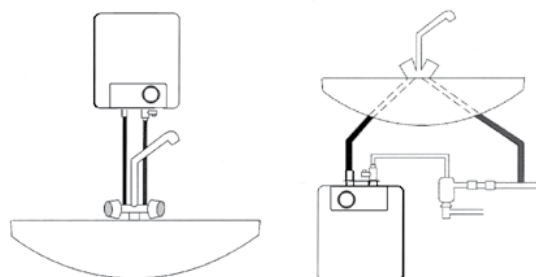

Models	Thermal Dispersion 65° (Kwh/24h)	Power Watts*	Voltage Volts	Heating Time dt 50°C	Max Temperature C°	Max Pressure (bar)	Humidity Protection	Class Insul.	Profile	Energy Class
<b>A12 SP</b>	0,38	1500	230	30'	75	8	IPX4	I	XXS	B
<b>A12 ST</b>	0,38	1500	230	30'	75	8	IPX4	I	XXS	C