




SEP

120/150/200/300

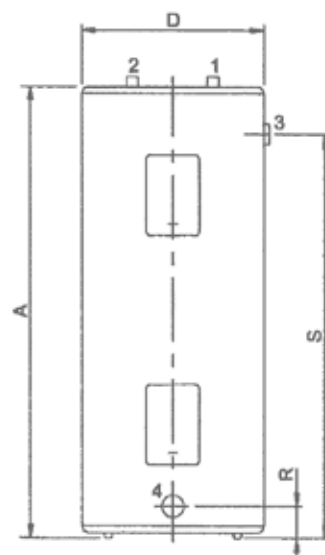

Models	A mm	D mm	R mm
SEP 120	740	550	200
SEP 150	930	550	200
SEP 200	1100	550	200
SEP 300	1750	550	200

Models	Thermal Dispersion 65° (Kwh/24h)	Power Watts*	Voltage Volts	Heating Time dt 50°C	Max Temperature C°	Max Pressure (bar)	Humidity Protection	Class Insul.	Profile	Energy Class
SEP 120	12,92	2000	230	80'	65	8	IPX4	I	L	C
SEP 150	12,92	2000	230	90'	65	8	IPX4	I	XL	C
SEP 200	12,92	2000	230	100'	65	8	IPX4	I	XL	C
SEP 300	17,23	3000	230	190'	65	8	IPX4	I	XL	C